

U1-9

BS CODE: **300901**

VOLTAGE **12V**

CCA **300A**


CAPACITY 20HR **28.0Ah**

CAPACITY 10HR -



DIMENSIONS

LENGTH	195 ±2mm	7.68 ±0.08inch
WIDTH	125 ±2mm	4.92 ±0.08inch
TOTAL HEIGHT	176 ±2mm	6.93 ±0.08inch
WEIGHT	6.4 kg ±5%	14.11 lbs ±5%

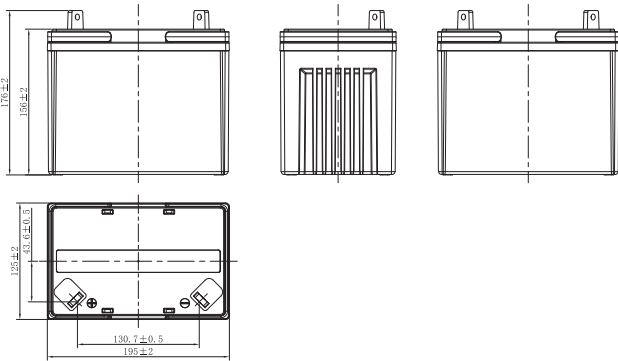


SLA FEATURES

- FACTORY ACTIVATED**
AGM (Absorbent Glass Mat) technology.
- READY TO USE**
Just plug & play.
- NO MAINTENANCE**
VRLA (Valve Regulated Lead Acid) design.
- SPILL-PROOF DESIGN**
Factory sealed & electrolyte held in a glass fiber mat.
- NO ACID HANDLING**
Very safe.
- HIGH STARTING POWER & EXTENDED CYCLE LIFE**

TERMINAL (mm)

POLARITY		
FRONT	SIDE	TOP

MOUNTING ANGLE

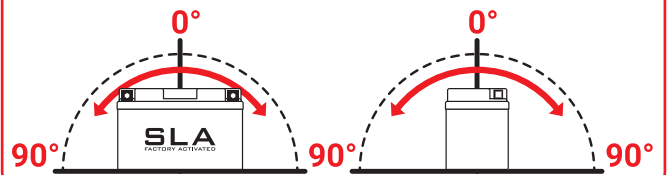

UPGRADE FOR

SLA MAX	SLA	MF	DRY
-	-	-	-