

## U1-12

BS CODE: **300877**

VOLTAGE **12V**

CCA **400A**


CAPACITY 20HR **32.0Ah**

CAPACITY 10HR -




### DIMENSIONS

<b>LENGTH</b>	195 ±2mm	7.68 ±0.08inch
<b>WIDTH</b>	125 ±2mm	4.92 ±0.08inch
<b>TOTAL HEIGHT</b>	176 ±2mm	6.93 ±0.08inch
<b>WEIGHT</b>	6.65 kg ±5%	14.66 lbs ±5%

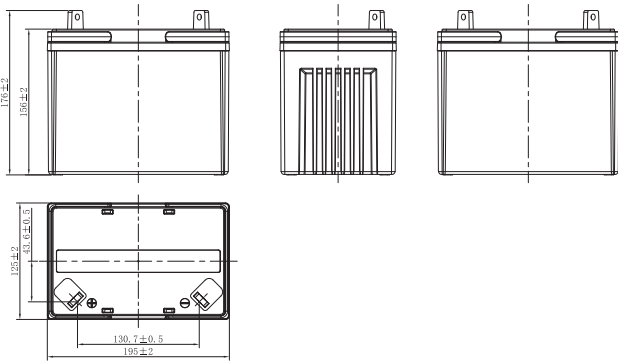

### TERMINAL (mm)


**POLARITY**

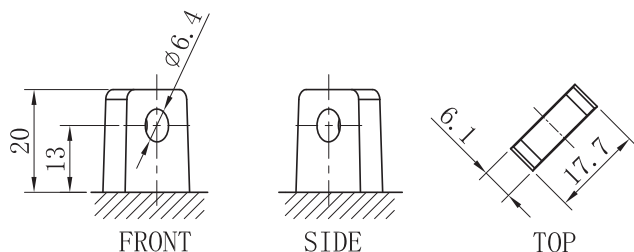

### SLA FEATURES

- FACTORY ACTIVATED**  
AGM (Absorbent Glass Mat) technology.
- READY TO USE**  
Just plug & play.
- NO MAINTENANCE**  
VRLA (Valve Regulated Lead Acid) design.
- SPILL-PROOF DESIGN**  
Factory sealed & electrolyte held in a glass fiber mat.
- NO ACID HANDLING**  
Very safe.
- HIGH STARTING POWER & EXTENDED CYCLE LIFE**

### MOUNTING ANGLE

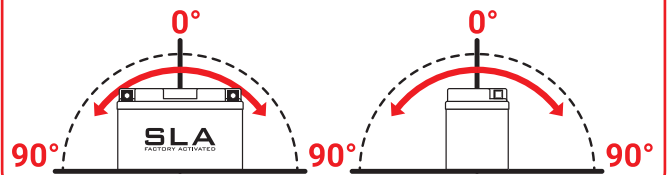

### UPGRADE FOR

SLA MAX	SLA	MF	DRY
-	-	-	-