

BTZ14S-BS

BS CODE: 300698

VOLTAGE **12V**

CCA **230A**


CAPACITY 20HR **11.8Ah**

CAPACITY 10HR **11.2Ah**




DIMENSIONS

LENGTH	150 ±2mm	5.91 ±0.08inch
WIDTH	88 ±2mm	3.46 ±0.08inch
TOTAL HEIGHT	110 ±2mm	4.33 ±0.08inch
WEIGHT	3.18 kg ±5%	7.01 lbs ±5%

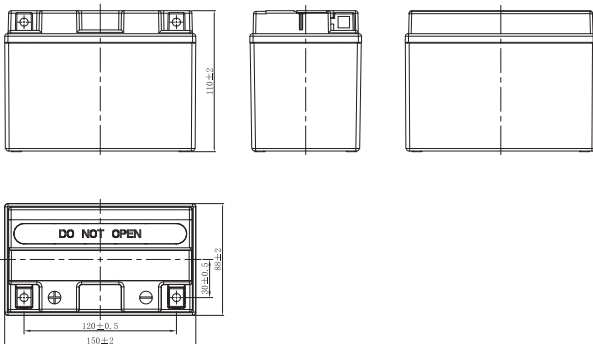

TERMINAL (mm)

POLARITY

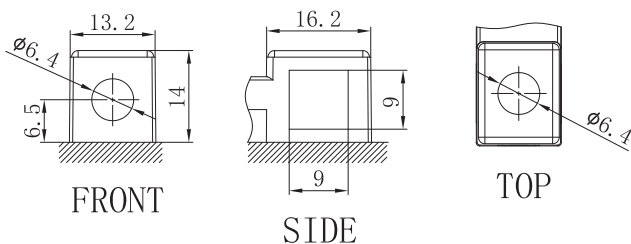

MF FEATURES



TO BE ACTIVATED

AGM (Absorbent Glass Mat) technology.



ACID PACK INCLUDED

For initial filling.



NO MAINTENANCE*

VRLA (Valve Regulated Lead Acid) design.



TIGHTLY SEALED AFTER FILLING

Electrolyte is held in a glass fiber mat.



SUPERIOR POWER & EXTENDED CYCLE LIFE




LONG SHELF LIFE

No need to be recharged while stocked (if not activated).

*once activated

MOUNTING ANGLE

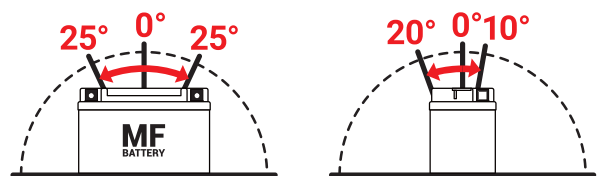

UPGRADE FOR

SLA MAX	SLA	MF	DRY
-	-	-	-