

BTZ12S

BS CODE: 300637-1

VOLTAGE **12V**

CCA **215A**


CAPACITY 20HR **11.6Ah**

CAPACITY 10HR **11.0Ah**



DIMENSIONS

LENGTH	150 ±2mm	5.91 ±0.08inch
WIDTH	88 ±2mm	3.46 ±0.08inch
TOTAL HEIGHT	110 ±2mm	4.33 ±0.08inch
WEIGHT	3.82 kg ±5%	8.42 lbs ±5%

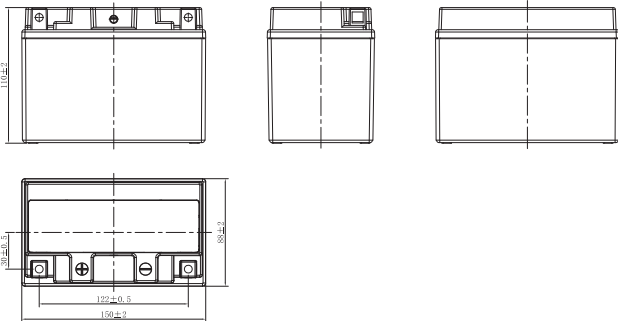


SLA FEATURES

- FACTORY ACTIVATED**
AGM (Absorbent Glass Mat) technology.
- READY TO USE**
Just plug & play.
- NO MAINTENANCE**
VRLA (Valve Regulated Lead Acid) design.
- SPILL-PROOF DESIGN**
Factory sealed & electrolyte held in a glass fiber mat.
- NO ACID HANDLING**
Very safe.
- HIGH STARTING POWER & EXTENDED CYCLE LIFE**

TERMINAL (mm)

POLARITY		
FRONT	SIDE	TOP

MOUNTING ANGLE

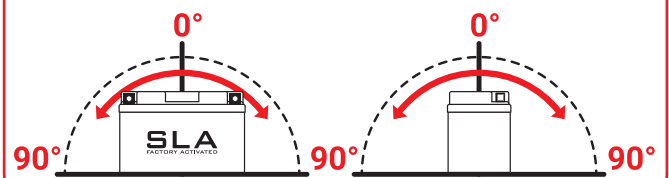

UPGRADE FOR

SLA MAX	SLA	MF	DRY
-	-	BTZ12S-BS	-