

BTX16-BS

BS CODE: 300609

VOLTAGE **12V**

CCA **230A**

CAPACITY 20HR **14.7Ah**

CAPACITY 10HR **14.0Ah**



DIMENSIONS		
LENGTH	150 ±2mm	5.91 ±0.08inch
WIDTH	87 ±2mm	3.43 ±0.08inch
TOTAL HEIGHT	161 ±2mm	6.34 ±0.08inch
WEIGHT	4 kg ±5%	8.82 lbs ±5%


Technical drawings showing front, side, and top views of the battery with dimensions:

- Front view: 150 ±2 (length), 87 ±2 (width), 27 ±0.5 (height), 120 ±0.5 (terminal width)
- Side view: 161 ±2 (total height), 9 (terminal height)
- Top view: 16.2 (terminal width), 9 (terminal depth), 13.2 (terminal offset), 14 (terminal height), 6.5 (terminal offset), 6.4 (terminal diameter)

TERMINAL (mm)	
POLARITY	

MF FEATURES	
	TO BE ACTIVATED AGM (Absorbent Glass Mat) technology.
	ACID PACK INCLUDED For initial filling.
	NO MAINTENANCE* VRLA (Valve Regulated Lead Acid) design.
	TIGHTLY SEALED AFTER FILLING Electrolyte is held in a glass fiber mat.
	SUPERIOR POWER & EXTENDED CYCLE LIFE
	LONG SHELF LIFE No need to be recharged while stocked (if not activated).

*once activated

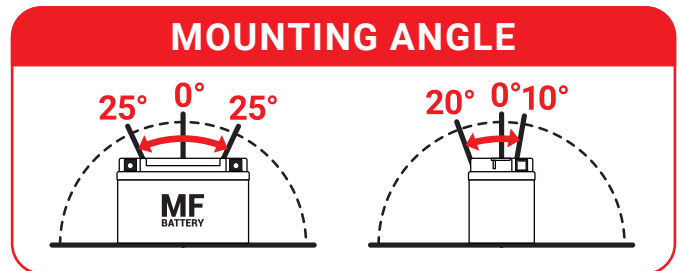

UPGRADE FOR			
SLA MAX	SLA	MF	DRY
-	-	-	-