

BTX4L+/BTZ5S

BS CODE: 300669

VOLTAGE **12V**

CCA **65A**


CAPACITY 20HR **4.2Ah**

CAPACITY 10HR **4.0Ah**




DIMENSIONS

LENGTH	113 ±2mm	4.45 ±0.08inch
WIDTH	70 ±2mm	2.76 ±0.08inch
TOTAL HEIGHT	85 ±2mm	3.35 ±0.08inch
WEIGHT	1.52 kg ±5%	3.35 lbs ±5%

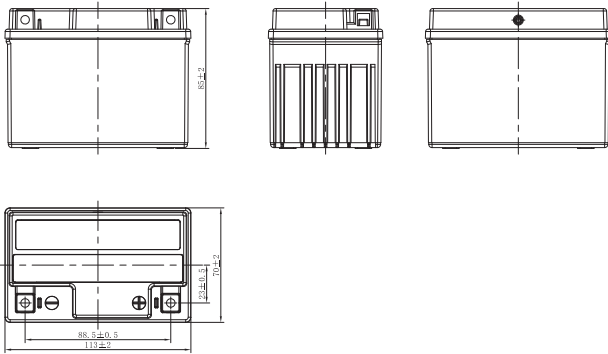

TERMINAL (mm)


POLARITY

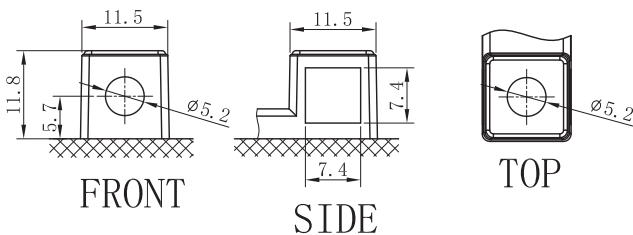

SLA FEATURES

- FACTORY ACTIVATED**
AGM (Absorbent Glass Mat) technology.
- READY TO USE**
Just plug & play.
- NO MAINTENANCE**
VRLA (Valve Regulated Lead Acid) design.
- SPILL-PROOF DESIGN**
Factory sealed & electrolyte held in a glass fiber mat.
- NO ACID HANDLING**
Very safe.
- HIGH STARTING POWER & EXTENDED CYCLE LIFE**

MOUNTING ANGLE

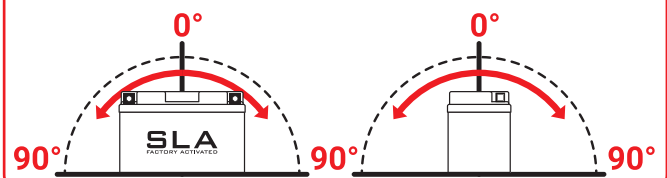

UPGRADE FOR

SLA MAX	SLA	MF	DRY
-	-	BTX4L-BS+/ BTZ5S-BS	