

BTZ7V

BS CODE: **300912**

VOLTAGE **12V**

CCA **105A**


CAPACITY 20HR **6.8Ah**

CAPACITY 10HR **6.5Ah**




DIMENSIONS

| | | |
|---------------------|-------------|----------------|
| LENGTH | 113 ±2mm | 4.45 ±0.08inch |
| WIDTH | 70 ±2mm | 2.76 ±0.08inch |
| TOTAL HEIGHT | 121 ±2mm | 4.76 ±0.08inch |
| WEIGHT | 2.34 kg ±5% | 5.16 lbs ±5% |

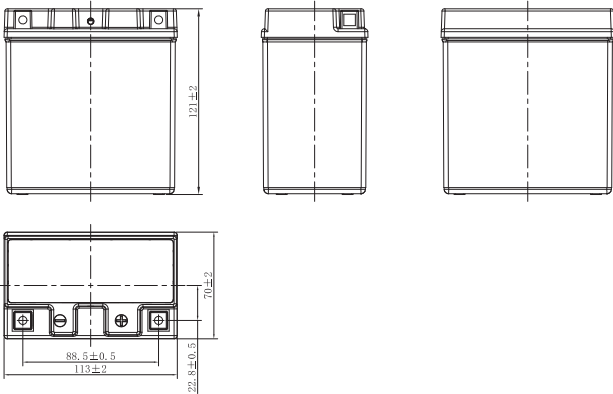

TERMINAL (mm)


POLARITY

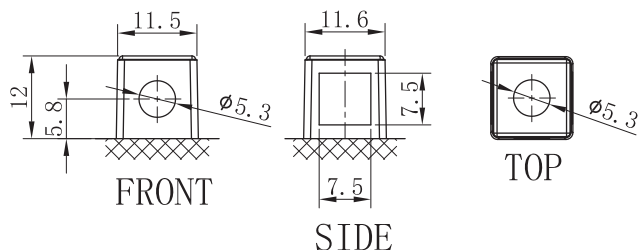

SLA FEATURES

- FACTORY ACTIVATED**
AGM (Absorbent Glass Mat) technology.
- READY TO USE**
Just plug & play.
- NO MAINTENANCE**
VRLA (Valve Regulated Lead Acid) design.
- SPILL-PROOF DESIGN**
Factory sealed & electrolyte held in a glass fiber mat.
- NO ACID HANDLING**
Very safe.
- HIGH STARTING POWER & EXTENDED CYCLE LIFE**

MOUNTING ANGLE

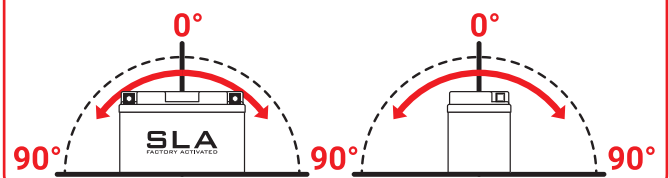

UPGRADE FOR

| SLA MAX | SLA | MF | DRY |
|---------|-----|----|-----|
| - | - | - | - |