

## BTX7A

BS CODE: 300672

VOLTAGE **12V**

CCA **105A**


CAPACITY 20HR **6.3Ah**

CAPACITY 10HR **6.0Ah**




### DIMENSIONS

<b>LENGTH</b>	150 ±2mm	5.91 ±0.08inch
<b>WIDTH</b>	87 ±2mm	3.43 ±0.08inch
<b>TOTAL HEIGHT</b>	93 ±2mm	3.66 ±0.08inch
<b>WEIGHT</b>	2.52 kg ±5%	5.56 lbs ±5%

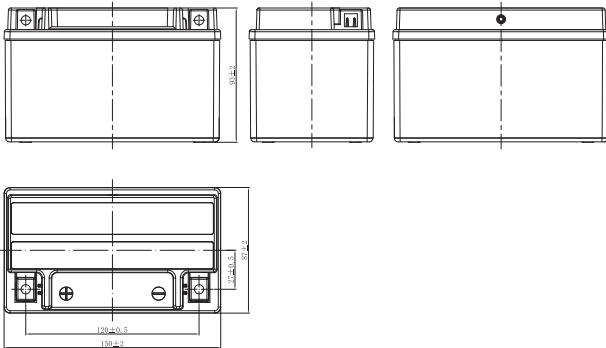

### TERMINAL (mm)


**POLARITY**

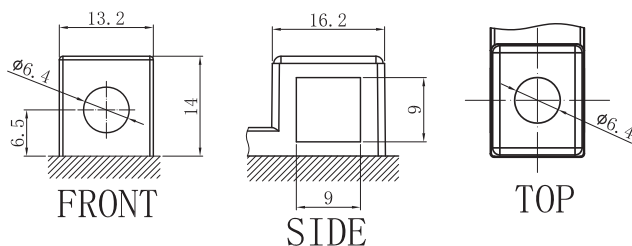

### SLA FEATURES

-  **FACTORY ACTIVATED**  
AGM (Absorbent Glass Mat) technology.
-  **READY TO USE**  
Just plug & play.
-  **NO MAINTENANCE**  
VRLA (Valve Regulated Lead Acid) design.
-  **SPILL-PROOF DESIGN**  
Factory sealed & electrolyte held in a glass fiber mat.
-  **NO ACID HANDLING**  
Very safe.
-  **HIGH STARTING POWER & EXTENDED CYCLE LIFE**

### MOUNTING ANGLE

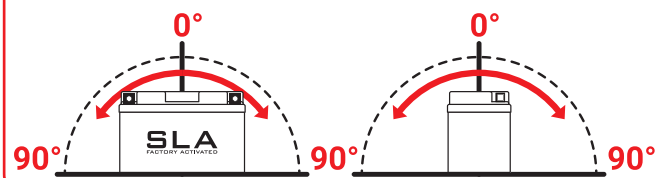

### UPGRADE FOR

SLA MAX	SLA	MF	DRY
-	-	BTX7A-BS	-