

BTZ10S

BS CODE: 300636-1

VOLTAGE **12V**

CCA **190A**

CAPACITY 20HR **9.1Ah**


CAPACITY 10HR **8.6Ah**



DIMENSIONS		
LENGTH	150 ±2mm	5.91 ±0.08inch
WIDTH	88 ±2mm	3.46 ±0.08inch
TOTAL HEIGHT	93 ±2mm	3.66 ±0.08inch
WEIGHT	3.15 kg ±5%	6.94 lbs ±5%

TERMINAL (mm)	
POLARITY	
FRONT	
SIDE	
TOP	

SLA FEATURES	
	FACTORY ACTIVATED AGM (Absorbent Glass Mat) technology.
	READY TO USE Just plug & play.
	NO MAINTENANCE VRLA (Valve Regulated Lead Acid) design.
	SPILL-PROOF DESIGN Factory sealed & electrolyte held in a glass fiber mat.
	NO ACID HANDLING Very safe.
	HIGH STARTING POWER & EXTENDED CYCLE LIFE

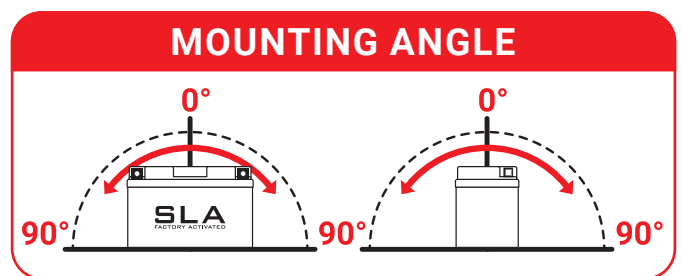

UPGRADE FOR			
SLA MAX	SLA	MF	DRY
-	-	BTZ10S-BS	-