

6N4-2A/A-4

BS CODE: **300916**

VOLTAGE **12V**

CCA **25A**

CAPACITY 20HR **4.2Ah**

CAPACITY 10HR **4.0Ah**




DIMENSIONS

LENGTH	71 ±2mm	2.8 ±0.08inch
WIDTH	71 ±2mm	2.8 ±0.08inch
TOTAL HEIGHT	93 ±2mm	3.66 ±0.08inch
WEIGHT	0.75 kg ±5%	1.65 lbs ±5%

SLA FEATURES

-  **FACTORY ACTIVATED**
AGM (Absorbent Glass Mat) technology.
-  **READY TO USE**
Just plug & play.
-  **NO MAINTENANCE**
VRLA (Valve Regulated Lead Acid) design.
-  **SPILL-PROOF DESIGN**
Factory sealed & electrolyte held in a glass fiber mat.
-  **NO ACID HANDLING**
Very safe.
-  **HIGH STARTING POWER & EXTENDED CYCLE LIFE**

MOUNTING ANGLE

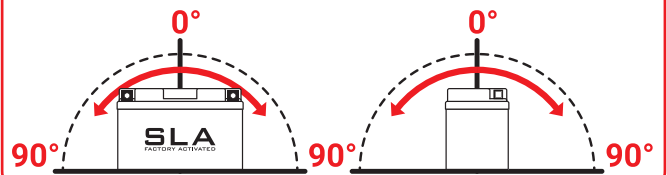

TERMINAL (mm)

POLARITY 

UPGRADE FOR

SLA MAX	SLA	MF	DRY
-	-	-	6N4-2A 6N4-2A-4