



Kraftfahrt-Bundesamt

DE-24932 Flensburg



MITTEILUNG

Ausgestellt von:

Kraftfahrt-Bundesamt

über die Erweiterung der Genehmigung
für einen Schutzhelmtyp mit Visiertyp(en) nach der Regelung Nr. 22

COMMUNICATION

Issued by:

Kraftfahrt-Bundesamt

concerning approval extended
of a type of protective helmet with visor type(s) pursuant to Regulation
No. 22

Nummer der Genehmigung: **05300574**
Approval No.:

Erweiterung Nr.: **01**
Extension No.:

1. Fabrik- oder Handelsmarke:
Trade name or mark:
LS2, MHR, TAKAI

2. Typ:
Type:
OF570

Ausführungen/versions:
1, 2

Handelsbezeichnung(en):
General commercial description(s):
VERSO, VERSO-1, OF570, OF570-1

3. Größen:
Sizes:
**XXS(51/52), XS(53/54), S(55/56), M(57/58), L(59/60), XL(61/62),
XXL(63/64), XXXL(65/66)**



Kraftfahrt-Bundesamt

DE-24932 Flensburg

2

Nummer der Genehmigung: 05300574, Erweiterung 01
Approval No.:

4. Name des Herstellers:
Manufacturer's name:
JIANGMEN PENGCHENG HELMETS LTD.
CN-Gonghe Town, Heshan City
5. Anschrift:
Address:
(s. 4.)
6. Gegebenenfalls Name des Vertreters des Herstellers:
If applicable, name of manufacturer's representative:
entfällt
not applicable
7. Anschrift:
Address:
(s. 6.)
8. Kurze Beschreibung des Helms:
Brief description of helmet:
siehe Anlagen
see enclosures
9. Helm ohne Kinnbügel **(J)**
Helmet without lower face cover **(J)**
10. Visiertyp oder Visiertypen:
Type of visor or visors:
OF-MHR-85 E1 22R 05300569

Ausführung/version 1:
Helmet with a protective visor and a sun shade

Ausführung/version 2:
Helmet with a peak, without a protective visor and without a sun shade
11. Kurze Beschreibung des Visiers oder der Visiere:
Brief description of visor or visors:
siehe Anlagen
see enclosures
12. Zur Genehmigung vorlegt am:
Submitted for approval on:
24.10.2016



Kraftfahrt-Bundesamt

DE-24932 Flensburg

3

Nummer der Genehmigung: 05300574, Erweiterung 01

Approval No.:

13. Technischer Dienst, der die Prüfungen für die Genehmigungen durchführt:
Technical service responsible for conducting approval tests:

SGS-TÜV Saar GmbH
DE-81379 München

14. Datum des Gutachtens des Technischen Dienstes:

Date of report issued by that service:

24.10.2016

15. Nummer des Gutachtens des Technischen Dienstes:

Number of report issued by that service:

SHHOM160700464-01

16. Bemerkungen:

Comments:

entfällt

not applicable

17. Die Genehmigung wird **erweitert**

Approval **extended**

18. Ort: **DE-24932 Flensburg**

Place:

19. Datum: **08.11.2016**

Date:

20. Unterschrift: **Im Auftrag**

Signature:


(D. Stieglitz)





Kraftfahrt-Bundesamt

DE-24932 Flensburg

4

Nummer der Genehmigung: 05300574, Erweiterung 01

Approval No.:

21. Folgende mit der oben erwähnten Genehmigungsnummer versehene Dokumente sind auf Anforderung erhältlich.
The following documents, bearing the approval number shown above, are available on request:

Nebenbestimmungen und Rechtsbehelfsbelehrung
Collateral clauses and instruction on right to appeal

1 Prüfbericht mit Anlagen
1 Test report with appendices

1 Beschreibungsmappe R22-OF570-01 (20 Blatt)
1 Information folder R22-OF570-01 (20 sheets)



Kraftfahrt-Bundesamt

DE-24932 Flensburg

Nr. der Genehmigung: 05300574, Erweiterung 01
Approval No.:

- Anlage -

Nebenbestimmungen und Rechtsbehelfsbelehrung

Nebenbestimmungen

Die Einzelerzeugnisse der reihenweisen Fertigung müssen mit den Genehmigungsunterlagen genau übereinstimmen. Die in der bisherigen Genehmigung enthaltenen Auflagen gelten auch für diese Erweiterung.

Rechtsbehelfsbelehrung

Gegen diese Genehmigung kann innerhalb eines Monats nach Bekanntgabe Widerspruch erhoben werden. Der Widerspruch ist **beim Kraftfahrt-Bundesamt, Fördestraße 16, DE-24944 Flensburg**, schriftlich oder zur Niederschrift einzulegen.

- Attachment -

Collateral clauses and instruction on right to appeal

Collateral clauses

The individual production of serial fabrication must be in exact accordance with the approval documents. The requirements contained in the previous approval are also valid for this amendment.

Instruction on right to appeal

This approval can be appealed within one month after notification. The appeal is to be filed in writing or as a transcript at the **Kraftfahrt-Bundesamt, Fördestraße 16, DE-24944 Flensburg**.

Technical Report

Test standard:
ECE Regulation No. 22

Level of amendment:
Supplement 2 to the 05 series of amendments

Name of test standard
Protective helmets and their visors

Manufacturer:
Jiangmen PengCheng Helmets Co., Ltd.

Type:
OF570

Subject of testing:
Component

0 General:

0.1	Make (trade name of manufacturer):	LS2, MHR, TAKAI
0.2	Type:	OF570
0.2.1	Commercial description(s):	VERSO, VERSO-1, OF570, OF570-1
0.3	Means of identification of type, if marked on the vehicle / component / technical unit:	n.a.
0.3.1	Location of that markings:	n.a.
0.4	Category of vehicle:	n.a.
0.5	Manufacturer's name and address:	Jiangmen Pengcheng Helmets Co., Ltd. Industrial Park East, Gonghe Town, Heshan City Guangdong Province, China
0.8	Address of assembly plant:	Jiangmen Pengcheng Helmets Co., Ltd. Industrial Park East, Gonghe Town, Heshan City Guangdong Province, China
0.9	Name and address of representative:	n.a.
	Location of the approval mark:	refer to information document

1 Test record:

See appendix

2 Attachments:

2.1 List of modifications:

2.2 Information folder:

No.: **R22-OF570-01**

Date of issue: **20.10.2016**

3 **Statement of conformity:**

The information folder as mentioned under no. 2.2 and the type described therein are in compliance with the test standard mentioned above. With regard to the required level of performance to be achieved, the test specimen were representative for the type to be approved.

The tests were carried out in accordance to the relevant requirements of the

☐ EN ISO/IEC 17025:2005 ☒ EN ISO/IEC 17020:2012

Test Laboratory **SGS-TÜV Saar GmbH**

notified by

Kraftfahrt-Bundesamt (KBA),
Federal Republic of Germany

National Standards
Authority of Ireland (NSAI)

Rijksdienst voor het
Wegverkeer (RDW),
The Netherlands

No. KBA - P 00084 – 10

No. 101


No. 99050064 00

Responsible expert

Conformity check by



Lell We



Doris Yang

Shanghai, 24.10.2016

This Technical Report shall be reproduced and published in full only and by the client only. It shall be reproduced partially with the written permission of the Test Laboratory only.

This document is issued by the Company under its General Conditions of Service accessible at <http://www.sgs-tuev-saar.com/en/broschueren/AGB-SGS-TUEV-EN.pdf>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Test record

1 Test object and measuring equipment

1.1 Test object

- | | |
|-------------------------------------|-----------------------------------|
| <input checked="" type="checkbox"/> | Protective helmet (without visor) |
| <input checked="" type="checkbox"/> | Protective helmet (with visor) |
| <input type="checkbox"/> | Visor |

1.1.1 Protective Helmet

Type:

OF570

Sizes:

XXS(51/52), XS(53/54), S(55/56),
M(57/58), L(59/60), XL(61/62),
XXL(63/64), **XXXL(65/66)**

Lower face cover:

- | | |
|-------------------------------------|------------------------------|
| <input checked="" type="checkbox"/> | Without lower face cover (J) |
| <input type="checkbox"/> | Protective (P) |
| <input type="checkbox"/> | Non protective (NP) |

1.1.2 Helmet visor

Visor type: OF-MHR-85
Approval No.: E1 22R 05300569

1.1.3 Sun shade

The helmet is equipped with a swivel-mounted sun shade, which may only be used in combination with the visor in closed position according to the user manual

Version 1: With a sun shade
Version 2: Without a sun shade

1.1.4 Remarks:

Version 1: Helmet with a protective visor and a sun shade
Version 2: Helmet with a peak, without a protective visor and a sun shade

1.2 Equipments for measuring and testing:

1.2.1 Test equipment:

The equipment and the test facilities on which the tests were carried out fulfilled the requirements of the ECE Regulation 22.05

1.2.2 Measurement procedure:

according to ECE Regulation No. 22.05

2 Test Results

Due to the reason of extension (see list of modifications), no further tests were required according to this regulation. The former test results remain valid.

2.1 Protective helmet

2.1.9 Impact-absorption tests (clause 7.3)

<input checked="" type="checkbox"/>	fulfilled
<input type="checkbox"/>	Not fulfilled
<input type="checkbox"/>	n.a.

Size: 61/62 cm

Test Head Form: O (62 cm)

Helmet No.	Condition	Test anvil	Test site	Velocity (m/s)	Peak 'G ≤275g	HIC ≤2400
XL-01	Solvent plus ambient temperature and hygrometry conditioning	Kerbstone	B	7.62	175.2	1226
		Kerbstone	X	7.62	218.2	1464
		Flat	P	7.58	196.2	1846
		Flat	R	7.60	194.2	1591
XL-02	Solvent plus ambient temperature and hygrometry conditioning	Flat	B	7.59	190.7	1480
		Flat	X	7.62	246.8	1902
		Kerbstone	P	7.62	142.5	1073
		Kerbstone	R	7.59	153.5	1033
XL-03	Solvent plus heat conditioning	Kerbstone	B	7.59	205.1	1292
		Kerbstone	X	7.60	230.4	1451
		Kerbstone	P	7.62	169.7	1193
		Kerbstone	R	7.59	145.7	988
XL-04	Solvent plus low temperature conditioning	Flat	B	7.58	190.8	1325
		Flat	X	7.62	258.4	1997
		Flat	P	7.62	206.5	1818
		Flat	R	7.61	193.6	1582
XL-05	Solvent plus ultra-violet radiation conditioning and moisture conditioning	Kerbstone	B	7.58	181.9	1231
		Flat	X	7.62	246.2	1927
		Flat	P	7.65	197.5	1829
		Kerbstone	R	7.59	148.1	1033

Size: 51/52 cm

Test Head Form: A (50 cm)

Helmet No.	Condition	Test anvil	Test site	Velocity (m/s)	Peak 'G $\leq 275g$	HIC ≤ 2400
XXS-01	Solvent plus heat conditioning	Kerbstone	B	7.59	140.6	1067
		Kerbstone	X	7.61	190.6	1463
		Kerbstone	P	7.58	181.6	1274
		Kerbstone	R	7.57	166.1	1353
XXS-02	Solvent plus low temperature conditioning	Flat	B	7.60	181.3	1468
		Flat	X	7.63	240.7	2087
		Flat	P	7.59	211.0	1998
		Flat	R	7.58	231.0	1766

Size: 53/54 cm

Test Head Form: E (54 cm)

Helmet No.	Condition	Test anvil	Test site	Velocity (m/s)	Peak 'G $\leq 275g$	HIC ≤ 2400
XS-01	Solvent plus heat conditioning	Kerbstone	B	7.59	174.9	1049
		Kerbstone	X	7.62	197.8	1404
		Kerbstone	P	7.60	151.7	1067
		Kerbstone	R	7.60	159.0	1140
XS-02	Solvent plus low temperature conditioning	Flat	B	7.58	170.7	1347
		Flat	X	7.60	230.2	1818
		Flat	P	7.60	194.9	1938
		Flat	R	7.62	186.0	1574

Size: 57/58 cm

Test Head Form: J (57 cm)

Helmet No.	Condition	Test anvil	Test site	Velocity (m/s)	Peak 'G $\leq 275g$	HIC ≤ 2400
M-01	Solvent plus heat conditioning	Kerbstone	B	7.60	158.3	1151
		Kerbstone	X	7.60	202.7	1472
		Kerbstone	P	7.61	173.8	1348
		Kerbstone	R	7.60	174.0	1392
M-02	Solvent plus low temperature conditioning	Flat	B	7.57	221.4	1512
		Flat	X	7.60	270.6	2219
		Flat	P	7.64	207.1	2160
		Flat	R	7.62	244.8	2256

Size: 59/60 cm

Test Head Form: M (60 cm)

Helmet No.	Condition	Test anvil	Test site	Velocity (m/s)	Peak 'G ≤ 275g	HIC ≤ 2400
L-01	Solvent plus heat conditioning	Kerbstone	B	7.63	150.7	1151
		Kerbstone	X	7.61	225.8	1517
		Kerbstone	P	7.61	165.1	1250
		Kerbstone	R	7.61	197.4	1321
L-02	Solvent plus low temperature conditioning	Flat	B	7.59	173.2	1321
		Flat	X	7.62	253.6	1865
		Flat	P	7.60	195.9	1932
		Flat	R	7.66	218.0	1838

Note: Above test results were for helmets with a peak, without a protective visor and a sun shade.

3 Other information

Place of testing: SGS CSTC Guangzhou, P.R. China

Date of testing: n.a.

4 Remarks: ---

List of modifications:

- | | | |
|---|------------------|--|
| 1 | Correction of: | Correct Impact-absorption tests results for
XXS(51/52), XS(53/54), M(57/58, L(59/60),
XL(61/62) for Version 2 helmets at section 2.1.9
of the technical report. |
| 2 | Modification of: | n.a. |
| 3 | Addition of: | Size add "XXXL(65/66)" |
| 4 | Deletion of: | n.a. |

INFORMATION DOCUMENT

No.: R22-OF570-01



Jiangmen Pengcheng Helmets Co., Ltd.

TYPE: OF570

Protective helmet with/without visor
pursuant to

Regulation No. 22

UNIFORM PROVISIONS CONCERNING THE APPROVAL OF
PROTECTIVE HELMETS AND THEIR VISORS FOR DRIVERS AND
PASSENGERS OF MOTORCYCLES AND MOPEDS

Signature of a responsible person:

A handwritten signature in black ink, appearing to be 'J. Pengcheng', written over a horizontal line.

Date: 20.10.2016

Reason of extension:

Correction: Correct Impact-absorption tests results for XXS(51/52), XS(53/54), M(57/58,
L(59/60), XL(61/62) for Version 2 helmets at section 2.1.9 of the technical report..

Modification: n.a.

Addition: Size add "XXXL(65/66)"

Deletion: n.a.



Type : OF570
 Manufacture : Jiangmen Pengcheng Helmets Co., Ltd.

Date:20.10.2016
 Page 2 of 20

0 GENERAL INFORMATION

- 0.1 Make (trade name of manufacturer) : LS2, MHR, TAKAI
 0.2 Type : OF570
 0.2.1 Commercial description(s) : VERSO, VERSO-1, OF570, OF570-1
 0.3 Variants / Versions : Version 1: Helmet with a protective visor and a sun shade
 Version 2: Helmet with a peak, without a protective visor and a sun shade
 0.4 Name and address of manufacturer : Jiangmen Pengcheng Helmets Co., Ltd.
 Industrial Park East, Gonghe Town, Heshan City Guangdong Province, China
 0.5 Name and address of assembly plant : Jiangmen Pengcheng Helmets Co., Ltd.
 Industrial Park East, Gonghe Town, Heshan City Guangdong Province, China
 0.6 Name and address of manufacturer's authorized representative(if any) : n.a.
 0.7 Location and method of affixing of the international approval mark : Marked in a label sewn on the retention system chin strap, see Annex 6

1 TECHNICAL DESCRIPTION

- 1.1 Description of the helmet
 1.1.1 Type of helmet : Open face
 1.1.2 Type of lower face cover : "J" none
 1.1.3 Size (s) : XXS(51/52), XS(53/54), S(55/56), M(57/58), L(59/60), XL(61/62), XXL(63/64), **XXXL(65/66)**
 1.1.4 Drawing of the helmet : See annex 1
 1.1.5 Type(s) of visor to which may be equipped with this helmet : OF-MHR-85
 1.2 Description of the visor : Visor type: OF-MHR-85
 Approval No.: E1 22R 05300569
 1.3 Description of the shell
 1.3.1 Material : ABS
 1.3.2 Manufacture method : Injection
 1.3.3 Ventilation : See Annex 1
 1.3.4 Composition of the border join on the shell : PVC
 1.3.5 Drawing of the shell : See annex 3
 1.4 Description of protective padding
 1.4.1 Composition : Expanded polystyrene
 1.4.2 Density and weight :

Size (cm)	Shell size	Comfort padding thickness (Main) (mm)	Protective padding Density (Main +Ears + Top) (Kg/m ³)	Protective padding Thickness (mm)	Protective padding Weight (Main +Ears + Top) (grams)
XXS(51/52)	S	16	35+45+24	30-35	74+30+15
XS(53/54)	S	12	35+45+24	30-35	74+30+15
S(55/56)	S	8	35+45+24	30-35	74+30+15
M(57/58)	S	12	60+75+24	30-35	112+52+18
L(59/60)	S	8	65+75+24	30-35	124+52+18
XL(61/62)	L	12	70+75+24	30-35	134+55+18
XXL(63/64)	L	8	70+75+24	30-35	134+55+18
XXXL(65/66)	L	6	70+75+24	30-35	134+55+18



Type : OF570
 Manufacture : Jiangmen Pengcheng Helmets Co., Ltd.

Date:20.10.2016
 Page 3 of 20

- hr/>
- 1.4.3 Drawing of the protective padding : See annex 4
- 1.5 Description of comfort padding
- 1.5.1 Composition of
 Comfort padding : Compound sponge
 Comfort tissue : Nylon
 Protection of the back of the nape : Compound sponge, Compound cloth and leather
 Lateral packing : EPS and compound sponge
 Lower face cover : n.a.
- 1.5.2 Drawing of the comfort padding : See annex 5
- 1.6 Description of the retention system
- 1.6.1 Chin strap
 Material : Nylon
 Width : 22 mm or 25 mm
- 1.6.2 Retention system : Type 1: Double-D ring with 25mm Chin strap
 Type 2: No.15 quick release mechanism with 22mm Chin strap
 Type 3: No.17 quick release mechanism with 22mm Chin strap
 Type 4: No.10 quick release mechanism with 22mm Chin strap
- 1.6.3 Comfort padding of the retention system
 Composition : Leather and textile
 Thickness : 3 mm
- 1.6.4 Anchorage system to the shell : By means of a metallic piece fixed to the shell by rivets
- 1.6.5 Drawing of the retention system : See annex 6
- 1.7 Other Characteristics
- 1.7.1 Markings
 Make : Rear part of the shell
 Weight : Rear part of the shell
 Size : Rear part of the shell
- 1.7.2 Indelible marking
 How it is made : Sewing
 Position : On the chin strap
- 1.8 Accessories
- 1.8.1 Peak : Available
- 1.8.2 Information for wearer
- 1.8.2.1 Text : See annex 7
- 1.8.2.2 Position : Hang on chin strap



Type : OF570
 Manufacture : Jiangmen Pengcheng Helmets Co., Ltd.


Date:20.10.2016

Page 4 of 20

ANNEXS

Annex 1	Drawing of the helmet	20.10.2016
Annex 2	Drawing of the sun shade	27.06.2016
Annex 3	Drawing of the shell	
	Shell type: Small	27.06.2016
	Shell type: Large	20.10.2016
Annex 4	Drawing of the protective padding	
	Protective padding type: Small	27.06.2016
	Protective padding type: Medium	20.10.2016
	Protective padding type: Large	20.10.2016
Annex 5	Drawing of the comfort padding	27.06.2016
Annex 6	Drawing of the retention system	
	Retention system type: 15 Buckle	27.06.2016
	Retention system type: 17 Buckle	27.06.2016
	Retention system type: Double "D" Ring	27.06.2016
	Retention system type: 10 Buckle	27.06.2016
Annex 7	Information for wearer	27.06.2016


Annex 1: Drawing of the helmet

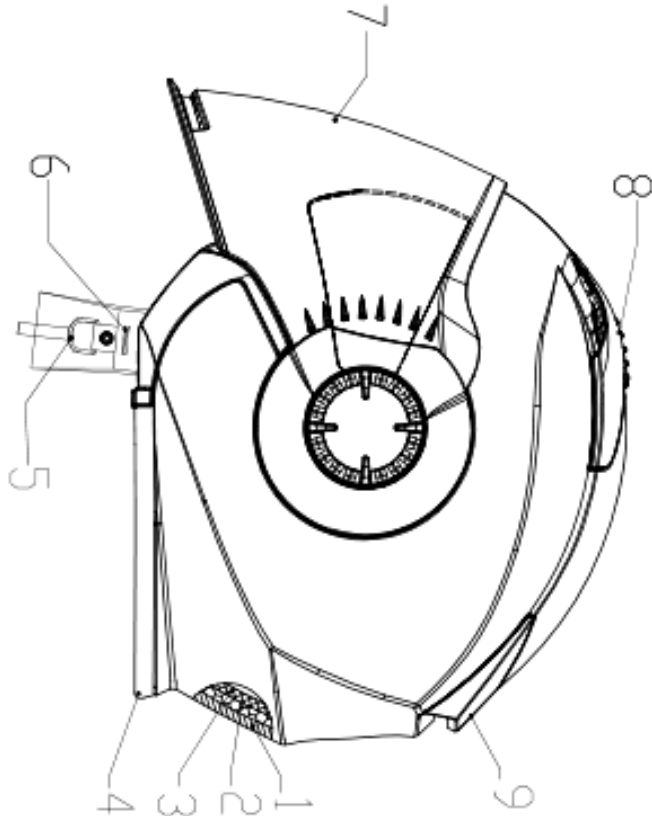

9	后风窗 back vent	个 piece	1	pc
8	前风窗 front vent	个 piece	2	pc
7	镜片 visor	套 set	1	pc
6	帽带 chin strap	条 unit	2	nylon
5	快速扣/成型平面快环扣 buckle/Double "D" ring	套 set	1	ss/ stainless steel
4	下胶边 rubber ring	条 unit	1	pvc
3	内衬 comfort padding	套 set	1	nylon
2	泡沫 protective padding	个 piece	5	eps
1	壳体 Outer shell	个 piece	1	abs
序号 number	名称 name	单位 unit	数量 piece	材料 material

MODEL	OF570 XXXL-XL				OF570 L-XXS			
SIZE	XXXL	XXL	XL	L	M	S	XS	XXS
α	66-65	64-63	62-61	60-59	58-57	56-55	54-53	52-51
technical requirement	<p>1. The surface of the outshell should be smooth and bright no mottle, pinhold, bulb, drop lack of oil , disclosure of basic color.</p> <p>2. Every spare parts should be fixed correctly , and not be loose, missed.</p> <p>3. Sun shade with Protective visor</p>							

Type : OF570
 Manufacture : Jiangmen Pengcheng Helmets Co., Ltd.

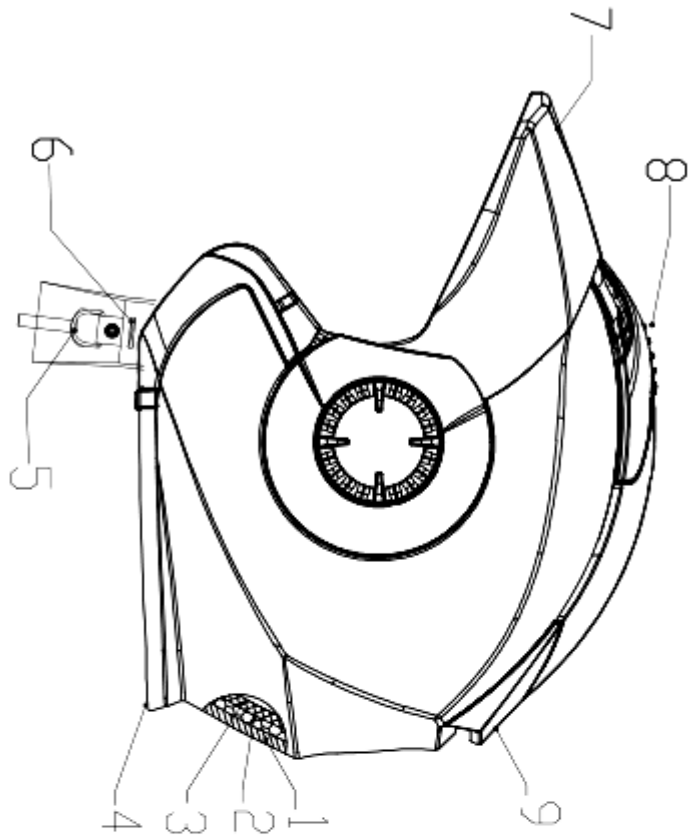



9	后风窗 back vent	个 piece	1	pc
8	前风窗 front vent	个 piece	2	pc
7	帽沿 peak	个 piece	1	pc
6	帽带 chin strap	条 unit	2	nylon
5	快速扣/压平面铁环扣 buckle/Double "D" ring	套 set	1	as/ stainless steel
4	下驳边 rubber ring	条 unit	1	pvc
3	内衬 comfort padding	套 set	1	nylon
2	泡沫 protective padding	个 piece	5	eps
1	壳体 Outer shell	个 piece	1	abs
序号 number	名称 name	单位 unit	数量 piece	材料 material

MODEL	OF570 XXL-XL			OF570 L-XXS				
SIZE	XXL	XL	XL	L	M	S	XS	XXS
CM	66-65	64-63	62-61	60-59	58-57	56-55	54-53	52-51

技术要求

1. The surface of the outshell should be smooth and bright no mottle, pinhole, bulb, drop lack of oil, discolor of basic color.
2. Every spare parts should be fixed correctly, and not be loose, missed.


Annex 2: Drawing of the sun shade

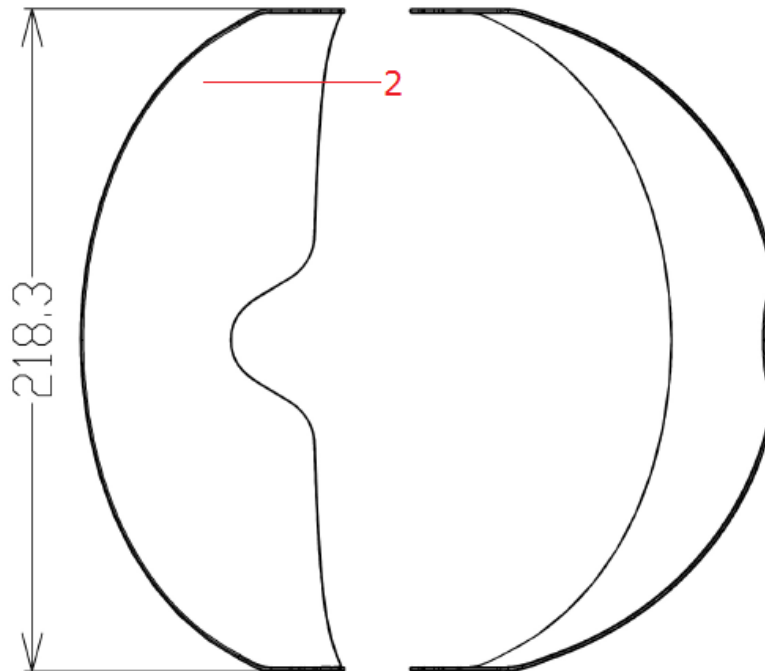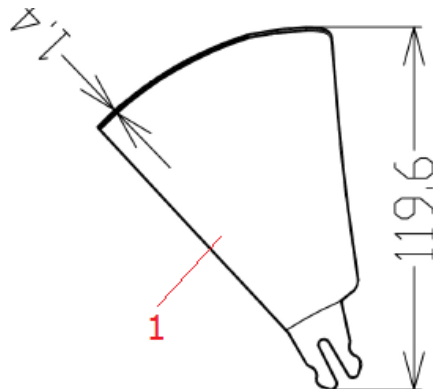


Unit: mm

Number	Name	Parameter	Number	Name	Parameter
1	Sun shade material	PC	2	Sun shade warning	DAY USE ONLY
Description	OF570 sun shade (Suit for Version 1 only)		Code No.:	OF570.1	
Manufacturer:	Jiangmen Pengcheng Helmets Co., Ltd.				
Address:	Industrial Park East, Gonghe Town, Heshan City Guangdong Province, China				
Drawn by:	Xinsheng Liu	Checked by:	Xinsheng Liu	Approved by:	Xiaofang Chen
Date:	27.06.2016	Date:	27.06.2016	Date:	27.06.2016

Annex 3: Drawing of the shell

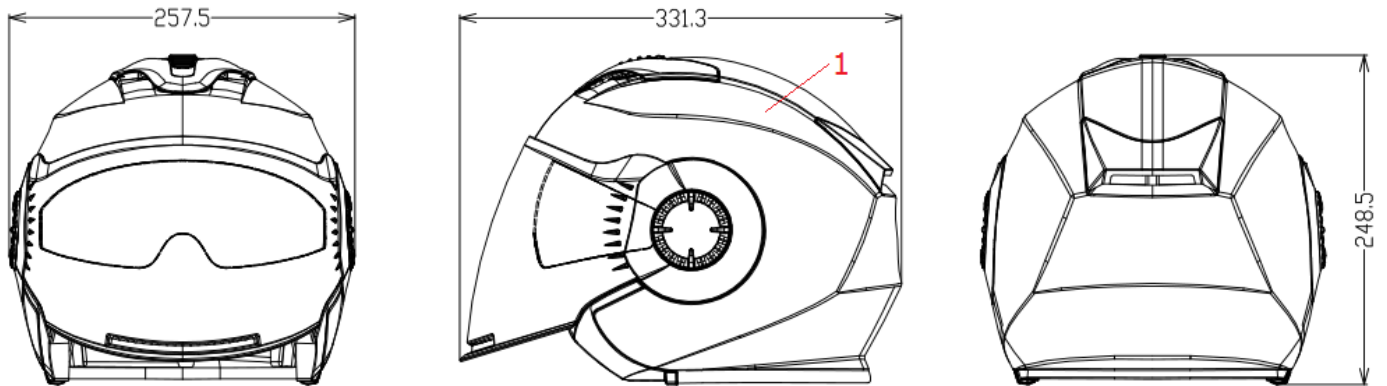

OF570 L-XXS

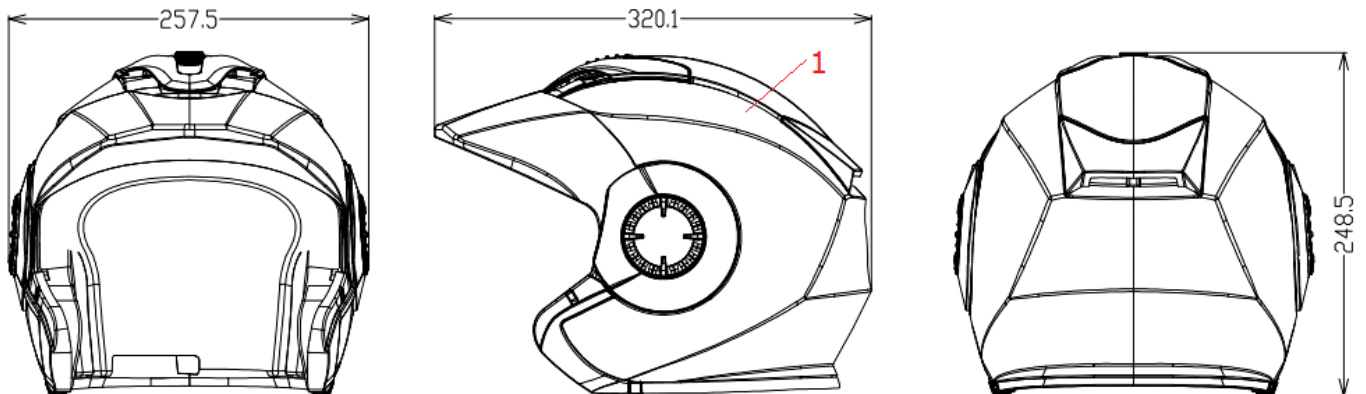

OF570 L-XXS

Unit: mm

Number	Name	Parameter	Number	Name	Parameter
1	Shell	ABS			
Description	OF570 Small Shell		Code No.:	OF570.2.1	
Manufacturer:	Jiangmen Pengcheng Helmets Co., Ltd.				
Address:	Industrial Park East, Gonghe Town, Heshan City Guagdong Province, China				
Drawn by:	Xinsheng Liu	Checked by:	Xinsheng Liu	Approved by:	Xiaofang Chen
Date:	27.06.2016	Date:	27.06.2016	Date:	27.06.2016

INFORMATION DOCUMENT


R22-OF570-01




Type : OF570
Manufacture : Jiangmen Pengcheng Helmets Co., Ltd.

Date:20.10.2016

Page 9 of 20

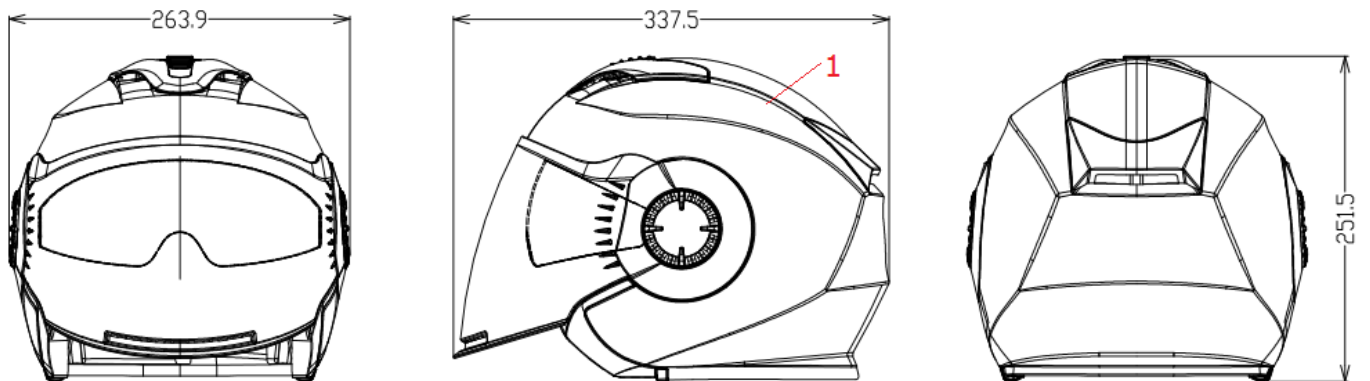

OF570 XXXL-XL

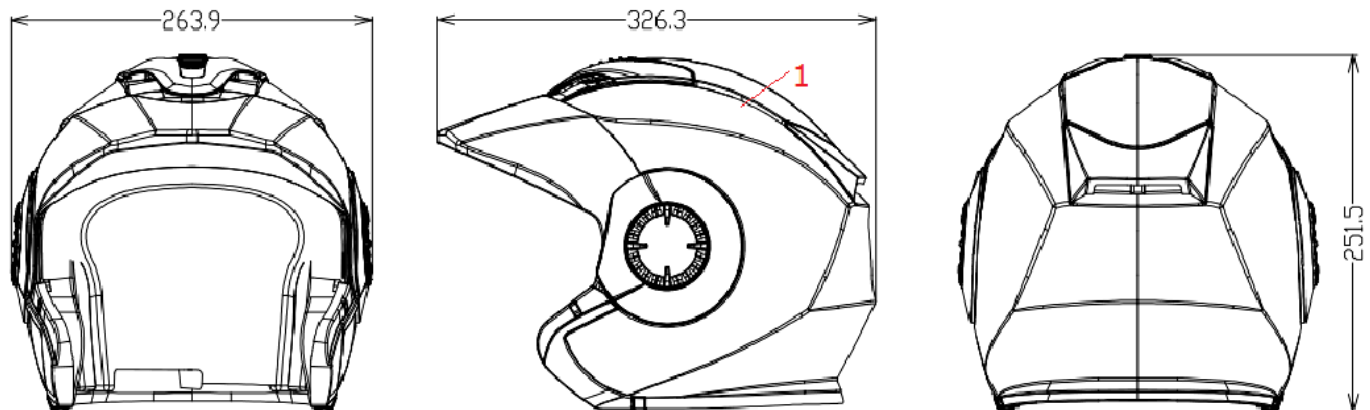


OF570 XXXL-XL

Unit: mm

Number	Name	Parameter	Number	Name	Parameter
1	Shell	ABS			
Description	OF570 Large Shell		Code No.:	OF570.2.2	
Manufacturer:	Jiangmen Pengcheng Helmets Co., Ltd.				
Address:	Industrial Park East, Gonghe Town, Heshan City Guagdong Province, China				
Drawn by:	Xinsheng Liu	Checked by:	Xinsheng Liu	Approved by:	Xiaofang Chen
Date:	20.10.2016	Date:	20.10.2016	Date:	20.10.2016

Annex 4: Drawing of the protective padding

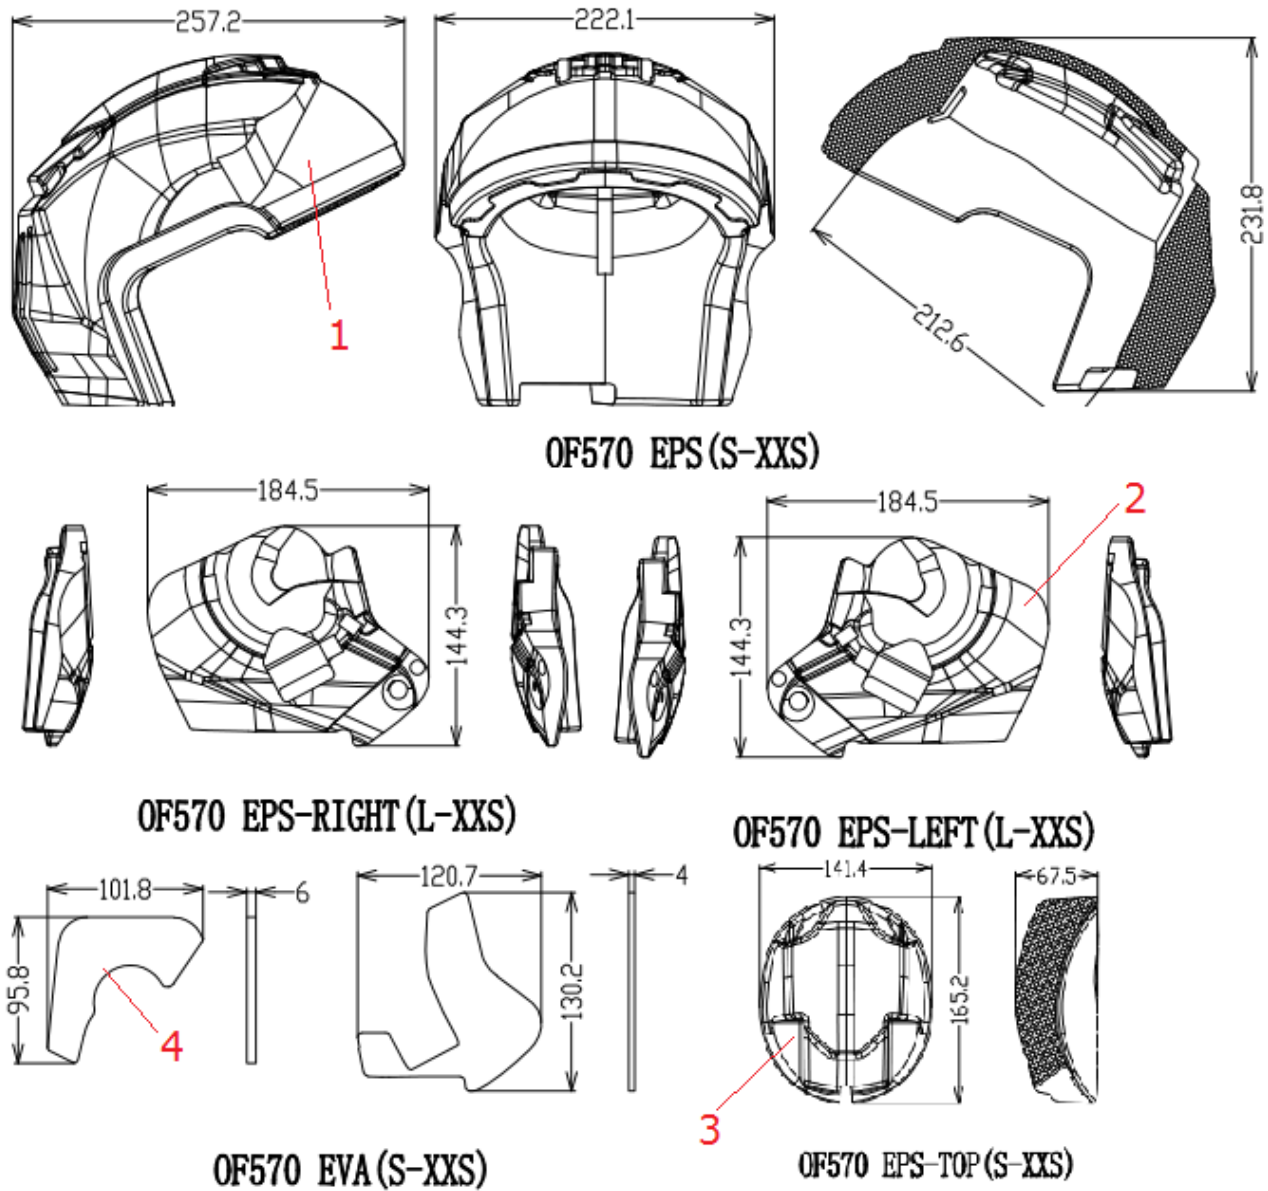

Unit: mm

Number	Name	Parameter	Number	Name	Parameter
1	Main Protective padding	EPS	3	Top inner Protective padding	EPS
2	Ear Protective padding	EPS	4	Ear Protective padding	EVA
Description	OF570 Small Protective padding		Code No.:	OF570.3.1	
Manufacturer:	Jiangmen Pengcheng Helmets Co., Ltd.				
Address:	Industrial Park East, Gonghe Town, Heshan City Guangdong Province, China				
Drawn by:	Xinsheng Liu	Checked by:	Xinsheng Liu	Approved by:	Xiaofang Chen
Date:	27.06.2016	Date:	27.06.2016	Date:	27.06.2016


INFORMATION DOCUMENT

R22-OF570-01



Type : OF570
 Manufacture : Jiangmen Pengcheng Helmets Co., Ltd.

Date:20.10.2016
 Page 11 of 20

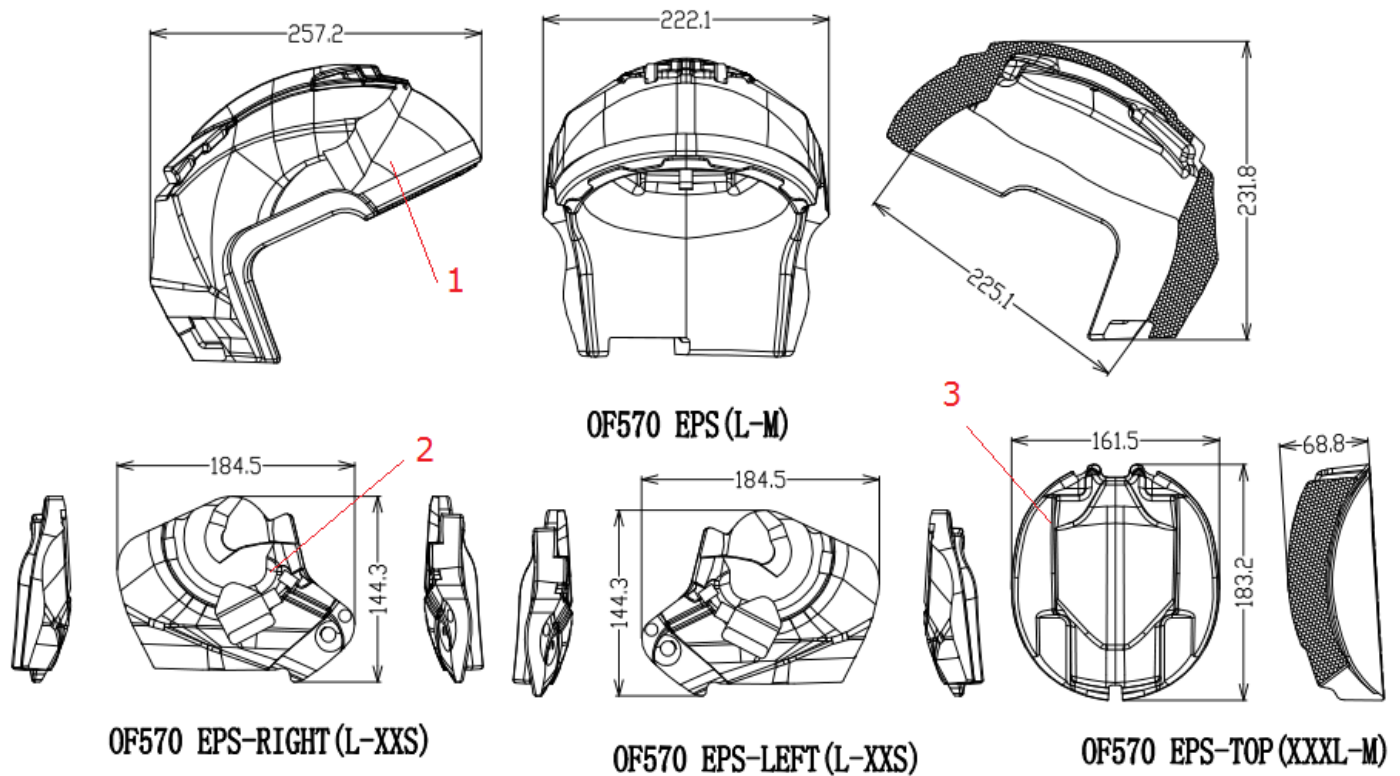

OF570 EPS (L-M)

Unit: mm

Number	Name	Parameter	Number	Name	Parameter
1	Main Protective padding	EPS	3	Top inner Protective padding	EPS
2	Ear Protective padding	EPS			
Description	OF570 Medium Protective padding		Code No.:	OF570.3.2	
Manufacturer:	Jiangmen Pengcheng Helmets Co., Ltd.				
Address:	Industrial Park East, Gonghe Town, Heshan City Guagdong Province, China				
Drawn by:	Xinsheng Liu	Checked by:	Xinsheng Liu	Approved by:	Xiaofang Chen
Date:	20.10.2016	Date:	20.10.2016	Date:	20.10.2016


INFORMATION DOCUMENT

R22-OF570-01



Type : OF570
 Manufacture : Jiangmen Pengcheng Helmets Co., Ltd.

Date:20.10.2016
 Page 12 of 20

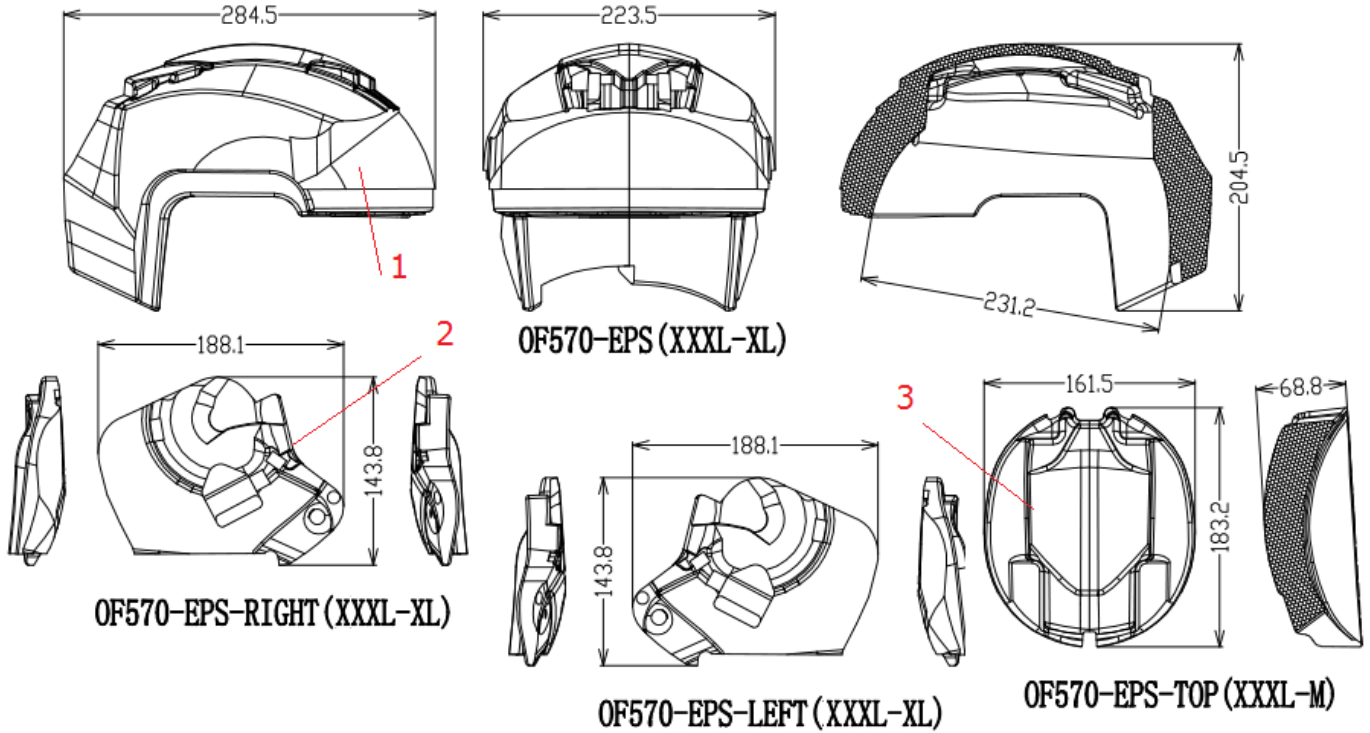


OF570-EPS (XXXL-XL)

Unit: mm


Number	Name	Parameter	Number	Name	Parameter
1	Main Protective padding	EPS	3	Top inner Protective padding	EPS
2	Ear Protective padding	EPS			
Description	OF570 Large Protective padding		Code No.:	OF570.3.3	
Manufacturer:	Jiangmen Pengcheng Helmets Co., Ltd.				
Address:	Industrial Park East, Gonghe Town, Heshan City Guagdong Province, China				
Drawn by:	Xinsheng Liu	Checked by:	Xinsheng Liu	Approved by:	Xiaofang Chen
Date:	20.10.2016	Date:	20.10.2016	Date:	20.10.2016

Annex 5: Drawing of the comfort padding

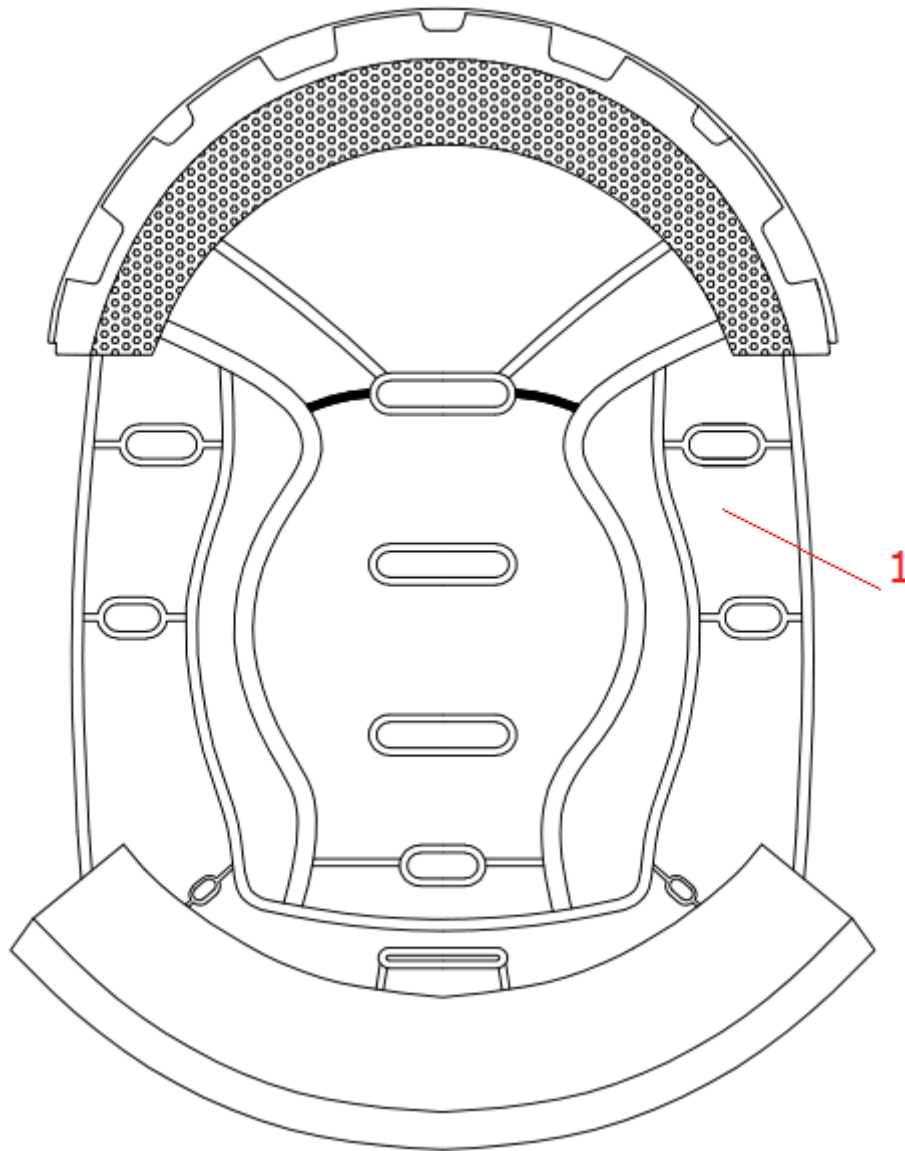

Number	Name	Material	Number	Name	Material
1	Comfort padding	Compound sponge + Nylon			
Description	OF570 Comfort padding		Code No.:	OF570.4	
Manufacturer:	Jiangmen Pengcheng Helmets Co., Ltd.				
Address:	Industrial Park East, Gonghe Town, Heshan City Guagdong Province, China				
Drawn by:	Xinsheng Liu	Checked by:	Xinsheng Liu	Approved by:	Xiaofang Chen
Date:	27.06.2016	Date:	27.06.2016	Date:	27.06.2016

Annex 6: Drawing of the retention system

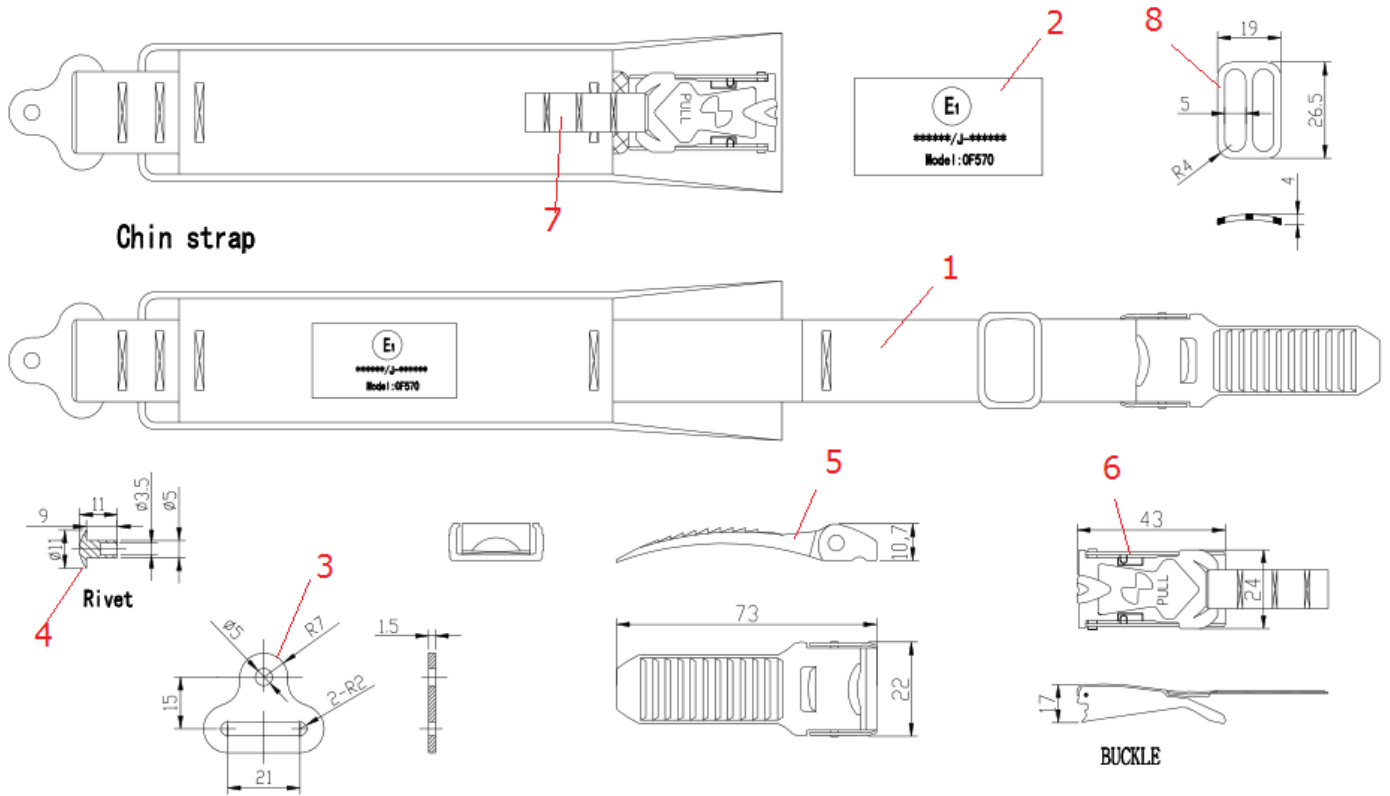

Unit: mm

Number	Name	Material	Number	Name	Material
1	Chin strap	Nylon	5	Slider	Polycarbonate + Steel
2	ECE Marking	Cloth	6	Quick release buckle	Polycarbonate + Steel
3	Hinge	Steel	7	Red small strap	Nylon
4	Rivet	Steel	8	“B” Ring	Nylon
Description	OF570 Retention system (15 Buckle)		Code No.:	OF570.5.1	
Manufacturer:	Jiangmen Pengcheng Helmets Co., Ltd.				
Address:	Industrial Park East, Gonghe Town, Heshan City Guangdong Province, China				
Drawn by:	Xinsheng Liu	Checked by:	Xinsheng Liu	Approved by:	Xiaofang Chen
Date:	27.06.2016	Date:	27.06.2016	Date:	27.06.2016


INFORMATION DOCUMENT

R22-OF570-01



Type : OF570
 Manufacture : Jiangmen Pengcheng Helmets Co., Ltd.

Date:20.10.2016
 Page 15 of 20

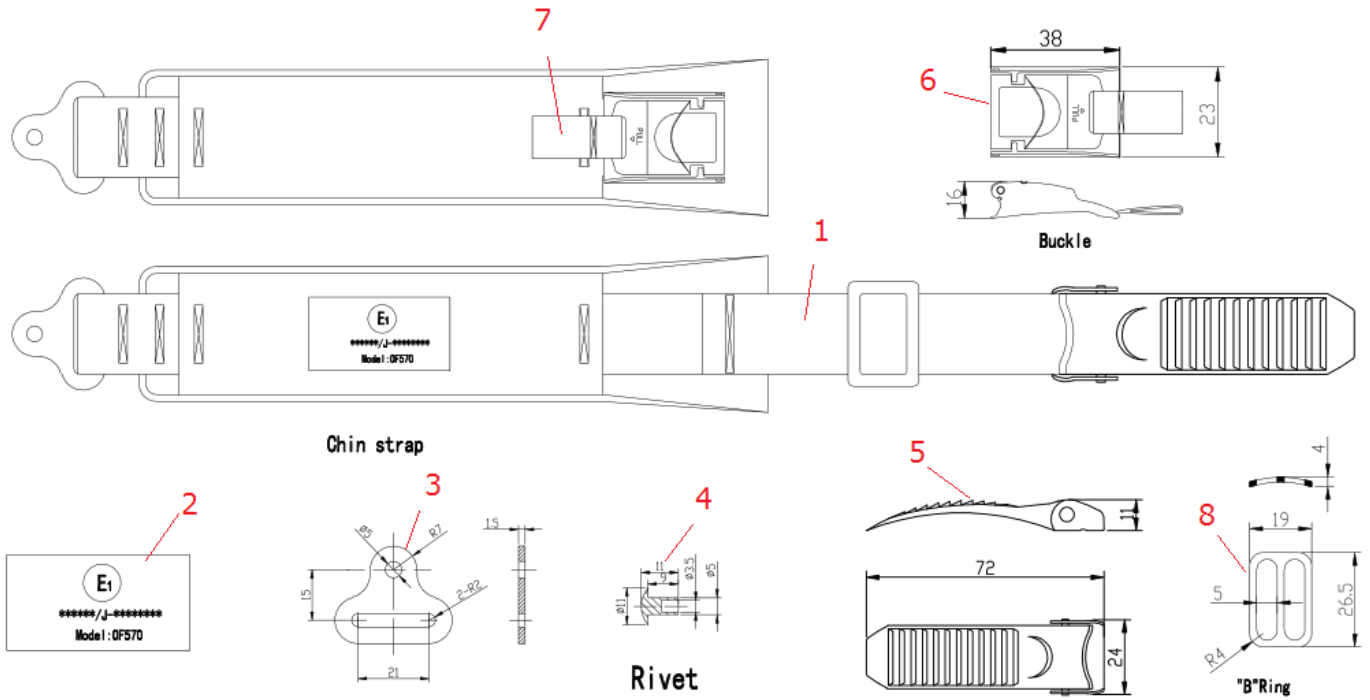

Unit: mm

Number	Name	Material	Number	Name	Material
1	Chin strap	Nylon	5	Slider	Polycarbonate + Steel
2	ECE Marking	Cloth	6	Quick release buckle	Polycarbonate + Steel
3	Hinge	Steel	7	Red small strap	Nylon
4	Rivet	Steel	8	“B” Ring	Nylon
Description	OF570 Retention system (17 Buckle)		Code No.:	OF570.5.2	
Manufacturer:	Jiangmen Pengcheng Helmets Co., Ltd.				
Address:	Industrial Park East, Gonghe Town, Heshan City Guangdong Province, China				
Drawn by:	Xinsheng Liu	Checked by:	Xinsheng Liu	Approved by:	Xiaofang Chen
Date:	27.06.2016	Date:	27.06.2016	Date:	27.06.2016

LS2

R22-OF570-01

Page 16 of 20



Number	Name	Material	Number	Name	Material
1	Chin strap	Nylon	4	Rivet	Steel
2	ECE Marking	Cloth	5	“D” Ring	Steel
3	Hinge	Steel	6	Red small strap	Nylon
Description	OF570 Retention system (Double “D” Ring)		Code No.:	OF570.5.3	
Manufacturer:	Jiangmen Pengcheng Helmets Co., Ltd.				
Address:	Industrial Park East, Gonghe Town, Heshan City Guagdong Province, China				
Drawn by:	Xinsheng Liu	Checked by:	Xinsheng Liu	Approved by:	Xiaofang Chen
Date:	27.06.2016	Date:	27.06.2016	Date:	27.06.2016


INFORMATION DOCUMENT

R22-OF570-01



Type : OF570
 Manufacture : Jiangmen Pengcheng Helmets Co., Ltd.

Date:20.10.2016
 Page 17 of 20

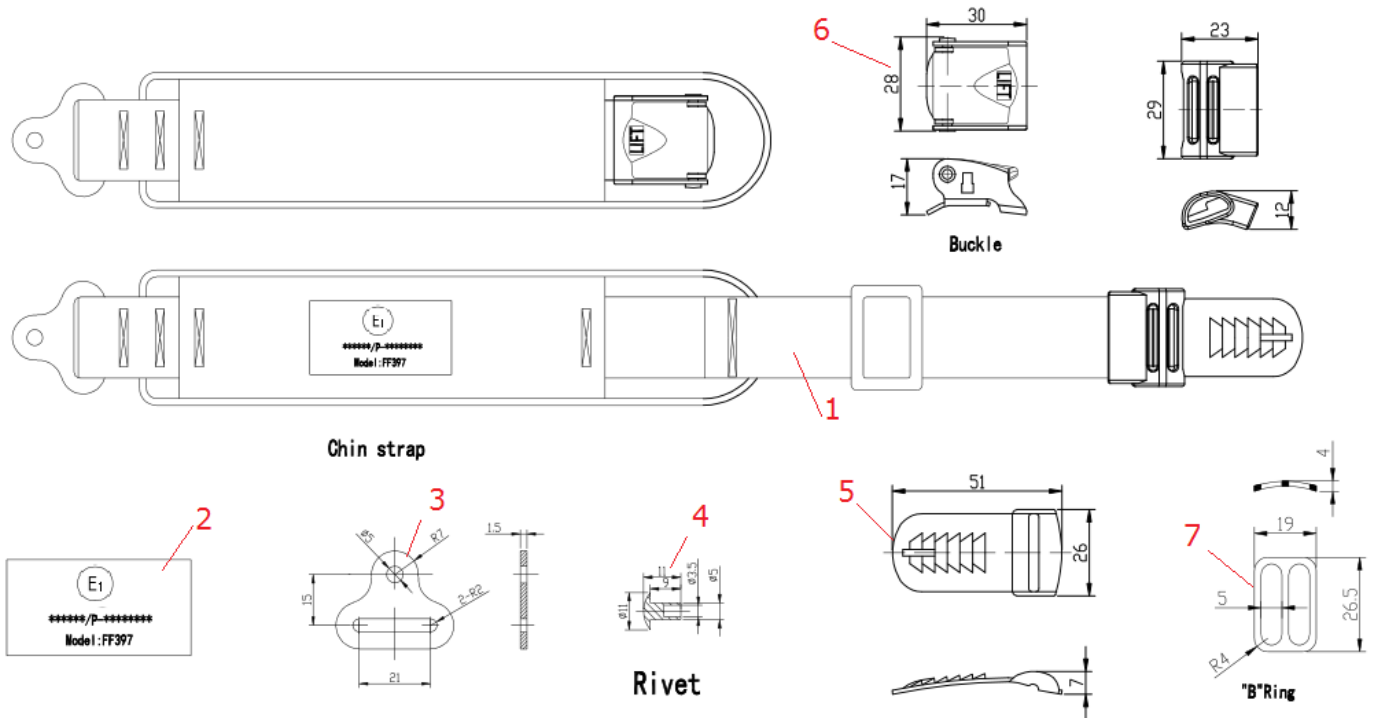

Unit: mm

Number	Name	Material	Number	Name	Material
1	Chin strap	Nylon	5	Slider	Steel
2	ECE Marking	Cloth	6	Quick release buckle	Polycarbonate + Steel
3	Hinge	Steel	7	“B” Ring	Steel
4	Rivet	Steel			
Description	OF570 Retention system (10 Buckle)		Code No.:	OF570.5.4	
Manufacturer:	Jiangmen Pengcheng Helmets Co., Ltd.				
Address:	Industrial Park East, Gonghe Town, Heshan City Guagdong Province, China				
Drawn by:	Xinsheng Liu	Checked by:	Xinsheng Liu	Approved by:	Xiaofang Chen
Date:	27.06.2016	Date:	27.06.2016	Date:	27.06.2016

Type : OF570
Manufacture : Jiangmen Pengcheng Helmets Co., Ltd.

Date:20.10.2016
Page 18 of 20

Annex 7: Information for wearer

Congratulations on purchasing your new **LS2** helmet. Please read these instructions carefully before use. They contain valuable informations to help you obtain the most protection from your helmet and to ensure a longer life for your helmet. All our products come from the most advanced research in terms of active security and design. The very high level for aerodynamism and comfort will get you the best performances all along the road. Whatever can be your choice leisure, tourism, racing, one of the helmets from the LS2 range is the best solution for your active protection.

1. Read these instructions thoroughly before using your helmet for the first time and store them safely for future reference.
2. A helmet like all products may wear out over time depending upon its use and the amount of care that is given. Please check your helmet every time before use for damage and do not use a damaged helmet. The most known standards of homologation recommend a helmet life of five years. LS2 agrees with their recommendation even though your helmet does not show any signs of malfunction, visible damage or defect. We strongly recommend you replace your helmet five years after the original date of purchase. See also "ONE IMPACT RULE" of item 3 in this manual, which says clearly "helmet is designed to help absorb one impact".
3. If you have any questions or comments concerning this helmet, please contact your nearest LS2 dealer or agent. Note that these specifications are subject to change without notice, as we continually strive to improve our products.

HOW TO CHOOSE A HELMET AND WEAR IT CORRECTLY

No helmet can protect the wearer against all foreseeable high speed and low speed impact, however, for maximum head protection the helmet must be of proper fit and the retention system must be securely fastened under the chin. Failure to have proper fit and to securely fasten the helmet is dangerous as the helmet could come off in an accident resulting in severe head injury or death.

1 To determinate proper fit.

- 1.1. Measure your head size. Wrap a tape measure horizontally around your head at the height of about 2,5 cm above your eyebrows. This will establish the longest measurement around your head.
- 1.2. Select the helmet that is the closest match to your head size. If your head size should fit between two helmet sizes, try on the smaller one first.

2 Try the helmet on

- 2.1. Expand the helmet opening by the straps, and slide your head into the helmet. Pull the chin straps only, not the chin straps cover, pulling on the covers may rip them. If the helmet is not tight, it is too big for you. If you are unfamiliar with helmets you may be reluctant to pull down the helmet which should feel tight. Even if you feel it is difficult to put it on, please use the smallest helmet possible.



3 Check for a proper fit. With the helmet, go through the following checklist to determine whether the helmet is the correct size.

- 3.1. Make sure the inner lining fits snugly all around your head.
- 3.2. Make sure the top pad presses closely to the top of your head.
- 3.3. Check whether the cheek pads are in contact with your cheeks.
- 3.4. Make sure there is no space between inner lining and brow where you could insert your finger.
- 3.5. Now, take hold of the helmet with a hand on each side. Without moving your head, try to move the helmet up and down, and side to side. You should feel the skin of your head and face being pulled as you try to move the helmet. If you can move the helmet around easily, it is too big. Try a smaller size.



4 Check the retention system and go through the following steps.

- 4.1. Fasten the chinstrap as tight as possible without causing you pain (see diagram 2). There must be no slack in the strap and it must be tight up against your chin.
- 4.2. With the chinstrap secured, put your hands flat on the back of the helmet and try to push the helmet off by rotating forward.
- 4.3. Next, put your hands on the front of the helmet above your forehead (or on the chinguard) and try to push the helmet off by rotating it toward the rear.
- 4.4. If the helmet starts to come off in either direction, do not use the helmet, either the helmet is too large for you or the chin strap is not tightened enough.



Tightening the chinstrap correctly is extremely important. Try to pull down on the chinstrap with the tips of your fingers if the strap is not against your chin or loosens, you have not properly put the strap through the D rings. Start again (see diagram 2) If your chinstrap is loose, the shock of an impact may knock your helmet off, leaving your head completely unprotected. Do not use a helmet that can be rolled off the head with the chinstrap fastened, since it may come off in an accident, resulting in death or serious personal injuries.

Type : OF570
 Manufacture : Jiangmen Pengcheng Helmets Co., Ltd.

Date:20.10.2016
 Page 19 of 20

D RING: To securely fasten the D ring retention system, thread the end of the chinstrap through the D rings only as shown in diagram 2 and put it tight against your throat. Clip the chin strap end hook on the D ring as shown in diagram 2 to secure the loose end of the chin strap after it's securely fastening the chin strap. The only function of the chinstrap end hook fitted on the end of the chinstrap is to avoid fluttering of the end part of the chinstrap.

Quick-release retention system: To fasten the strap, push the metal tongue firmly into the buckle until it locks with a click. Pull the strap tight and pass the end of the strap through the strap ring or ladder to secure it. To release the strap, press the two catches inward (or slide the catches down).

SAFETY RECOMMENDATIONS

1

No helmet can protect wearer against all foreseeable high speed and low speed impacts.

However, for maximum head protection, the helmet must be of proper fit and retention system must be securely fastened under the chin. The helmet should allow peripheral vision when secure on your head. If your helmet is too large, it may sleep or move on your head while riding which may make it possible for your helmet to come off in an accident or to obstruct your vision while riding. In the first case, your helmet will not protect your head in an accident, which can result in serious personal injury or death and in the second case, if you cannot see you may have an accident.

2

Use only a helmet that fits snugly all around your head, and fasten the chinstrap securely under your chin.

Expand the helmet opening with your hands, and slide your head into the helmet. Please check whether the helmet fits properly according to the checklist (paragraph 3, page 3). Pull the chinstraps only, not the chinstraps covers. Pulling on the covers may rip them, if the helmet is not tight, it is too big for you. To securely fasten the D ring retention system, thread the end of the chinstrap through the D rings only as shown, and pull it tight up against your throat. In the case of quick-release retention system, refer to upper paragraph. If your chinstrap is loose, the shock of an impact may knock your helmet off leaving your head completely unprotected resulting in serious personal injury or death.

3

Helmets are designed to help absorb ONE impact. After your helmet has protected you from an impact, you must get a new one.

Your helmet is designed to distribute the force incurred during an impact over a wide area. Even if your helmet looks undamaged externally its useful life is finished after one impact during riding, for example, a capsize or accident where you and your helmet hit the ground or some object. In an impact, the helmet's impact absorbing liner becomes compacted. Once this has happened, the helmet no longer has the ability to absorb further impacts. Your helmet may look the same, but it will not provide protection in an accident. If you have any doubts, for example, if you drop your helmet or if it is hit by something and you are not sure if this one impact rule applies, consult your LS2 dealer before you use the helmet again.



page 4

4

Clean your helmet carefully.

Never use hot or salt water, benzene, gasoline, glass cleaner or other solvents. Your helmet could be seriously damaged by these substances without showing any apparent visible damage. A helmet damaged or weakened by a cleaning agent may not provide head protection in an accident resulting in serious personal injury or death. The correct way to clean a helmet is to mix 5 or 6 drops of mild soap in a quart of warm water. Dampen a soft cloth with this solution and wipe the helmet clean. Rinse with a wet cloth.

5

Never modify your helmet.

It is very dangerous to drill holes or cut the shell and/or the shock absorber liner. Modifications can seriously weaken the helmet. Modifying the retention system weakens it, and it may snap in an impact, removing parts such as the mouth guard or rubber face trim can expose edges, which may injure you in an accident. Always use approved LS2 parts when replacing shields, screws, or any other parts. A weakened helmet will not provide protection.

6

Don't mistreat your helmet.

Never ride with the helmet hanging from the helmet holder, and don't hang the helmet from angled supports like a mirror. Don't sit on your helmet or throw it around. You should not expose the liner of your helmet to strong sunlight and excessive heat such as near heaters or where temperatures exceed 50° C (122 F). Avoid the spray of insect repellent chemicals (such as "naphtalene") near the helmet. Mistreating your helmet will damage the shell and impact absorbing liner and reduce the helmet's ability to protect you in an accident.

7

Always check your helmet before riding off.

1. Check the shield and visor screws, and retighten them if necessary.
2. Check for cracks in the helmet. Strong acid (for example, battery acid) can damage the shield base. If you find cracks or damage, stop using the helmet immediately.
3. Plastic components may start to wear out about 5 years after manufacture. If you find deterioration in any part of a component, either replace that component or get a new helmet. If these parts come loose and / or fall off while you are riding, your vision may be blocked which could cause an accident resulting in serious personal injury or death.
4. Check the security of the retention system
5. Make sure that the center pad (or comfort liner) and the cheek pads are attached before you use the helmet.

page 5





Type : OF570
Manufacture : Jiangmen Pengcheng Helmets Co., Ltd.

Date:20.10.2016
Page 20 of 20

8

Maintain your helmet shield in good condition.

If your shield becomes too scratched or undearable, replace it with a new one. Impaired visibility causes accidents. Clean your shield with mild soapy water, rinse well with clean water, and dry with a soft cloth. Never use benzene gasoline, glass cleaner or any other solvents. Do not attach stickers or adhesive tape to the shield, as this will weaken the hard coating. This can damage the shield. Do not drive with a dim or blurred face shield. Impaired vision can cause an accident resulting in serious personal injury or death.

9

Do not repaint the helmet.

We do not recommend you repaint the helmet, because paint and thinner can damage the materials used in the helmet construction. A helmet damaged weakened by a paint agent may not provide head protection in an accident resulting in serious personal injury or death. If you must paint your helmet, please consult your LS2 dealer.

10

Remember: helmets block important sounds and reduce awareness of environmental changes.

When you wear a helmet, especially a full-face type, you are somewhat isolated from the environment around you. Weather changes can catch you unprepared: sudden showers or temperature variations as you enter or leave tunnels or climb mountain roads can cause unexpected misting of your shield and loss of visibility. Do not drive with a fogged face shield. Wearing a helmet also reduces your ability to hear traffic sounds, especially of high speed. With a full face helmet, opening and closing the shield makes a major difference in how much you can hear. For safe riding be aware of how your helmet type, your speed, affects your perception of road conditions and whether your shield is open.

11

Warning: the sun shade should be used accompany with the protective visor. Do not use the sun shade only



page 8

